


HELISEM® RANGE

VT SERIES MIXERS

Closed tanks from 3 to 100 m³- Sealing system – Pressure from -1 to 6 barg – Temperature up to 150°C

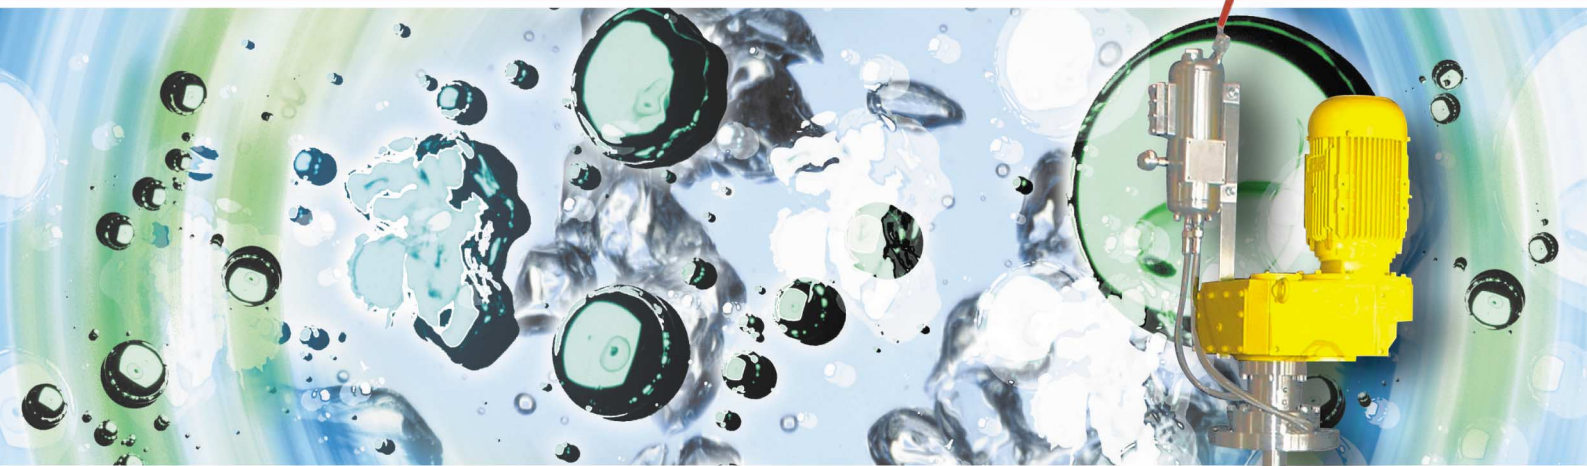

SERIE VT



Severe operating conditions

- Closed tanks
- Pressure from -1 to 6 barg
- Temperature up to 150°C



Several sealing systems available

- Lip seal
- Simple or double mechanical seal, dry or lubricated.
- The mechanical seal are of standard type or according to standards EN 12756 and DIN 24960, 28137 and 28154



A simple and modern design

- Modern friction materials
- Optimized number of components
- Simple design
- Mechanical seal made up of standardized and interchangeable elements at a very competitive price
- All VT agitators are provided with a high output propeller



An easy maintenance

- Weight and number of elements extremely reduced
- At the time of this operation, the shaft provided with its mobile remains in position in the tank
- All the mobiles are adjustable in position



For your applications in:

- Chemicals
- Pharmaceutical products
- Cosmetic processes
- Food industry



VTG Mixers

VT AGITATORS

TYPES	PRESSURE Barg	TEMPERATURE °C	SEALING
VTB	0.1	100	Lip seal
VTD	-1 to atmospheric pressure	80	Single mechanical seal with static quench
VTF	-1 to atmospheric pressure	80	Single mechanical seal, dry operation
VTE	-1 to 0.5	80	Single mechanical seal with a PVC pot
VTL	-1 to 0.5	100	Single mechanical seal with an SS tank
VTG	-1 to 6	120	Double mechanical seal with an SS tank
VTH	-1 to 6	150	Double mechanical seal with a tank and a cooling coil



MILTON ROY
Mixing

VT AGITATORS TECHNICAL CHARACTERISTICS (HÉLISEM® RANGE)

Type	Rated Power (kW)	Motor Speed (rpm)	Maximum Height (mm)	Impeller Diameter (mm)	Impeller flow (m³/h)	Axial load (DaN)	Torque (DaNm)	Minimum hole for impeller introduction (mm)
2061	0.55	111	2100	630	750	26	10	270
2062	0.75	125	1900	630	840	25	12	
2063	0.75	145	1700	630	980	24	10	
2081	0.75	84	2400	800	1165	31,2	17	270
2082	1.1	104	2050	800	1435	30	20	
2083	1.1	113	1900	800	1565	30	19	
2084	1.5	125	1750	800	1730	30	23	
3101	1.1	75	2850	1000	2030	42	28	360
3102	1.5	81	2700	1000	2220	43	35	
3103	2.2	96	2450	1000	2600	42	44	
3104	2.2	104	2300	1000	2735	52	40	360
3121	1.5	55	3150	1250	2900	55	52	
3122	2.2	67	2800	1250	3530	54	63	
3123	3	75	2550	1250	4000	53	77	
3124	3	82	2350	1250	4300	55	70	360
4141	1.5	48	3900	1400	3600	82	60	
4142	2.2	53	3700	1400	3930	81	79	
4143	3	58	3500	1400	4300	81	99	
4144	4	70	3050	1400	5164	79	110	360
4161	2.2	40	4300	1600	4400	94	105	
4162	3	48	3700	1600	5310	93	120	
4163	4	55	3250	1600	6030	100	140	
4164	5.5	60	3100	1600	6600	100	175	450
5201	3	36	5300	2000	7820	162	160	
5202	4	40	5000	2000	8620	159	190	
5203	5.5	44	4400	2000	9460	172	240	
5204	7.5	48	4300	2000	10300	173	300	560
5251	4	29	5400	2500	12150	238	264	
5252	7.5	33	4700	2500	14000	235	434	
5253	7.5	37	3700	2500	15660	269	390	

Extract of the range, thanks to consult us for any other request.



DOSAPRO MILTON ROY
10, Grande Rue
27360 PONT SAINT PIERRE
FRANCE
Tel : +33 (0) 2.32.68.30.00
Fax : +33 (0) 2.32.68.30.93
www.dosapro.com

UNITED KINGDOM – MILTON ROY UK, LTD
Oaklands Business Centre, Oaklands Park,
Wokingham Berkshire RG 41 2FD
Tel : +44 118 977 1066 Fax : +44 118 977 1198
www.miltonroyumps.co.uk

ESPAÑA - DOSAPRO MILTON ROY IBERICA
C/ Embajadores, 100 – 28012 Madrid
Tel : +34 (91) 517 80 00 Fax : +34 (91) 517 52 38
www.dosapro.es

ITALIA – MILTON ROY ITALIA
Centro Direzionale Colleoni, palazzo andromeda ingresso 1,
via paracelso 16, 20041Agrate Brianza (MI)
Tel : +39 039 605 68 91 Fax : +39 039 605 69 06
www.miltonroy.it



MILTON ROY MIXING
10, rue du bois Gasseau BP N°94
77212 AVON Cedex
FRANCE
Tel : +33 (0) 1.60.74.95.20
Fax : +33 (0) 1.60.74.95.29
www.miltonroymixing.com